

INSTALLATION

Drill Center Hole

1. To avoid the drill slipping on the fender, use a Center Punch to make an impression at the center of the drill hole marked on the Template. **(Center Punch)**



Area between front fender and tire is tight. **DO NOT** drill into tire. Place a thin piece of wood between the fender and the tire to avoid tire damage.

2. Start the hole normal to surface, angle drill downward to elongate hole slightly. **(Power Drill with 3/16" Drill Bit.)**

Figure 5

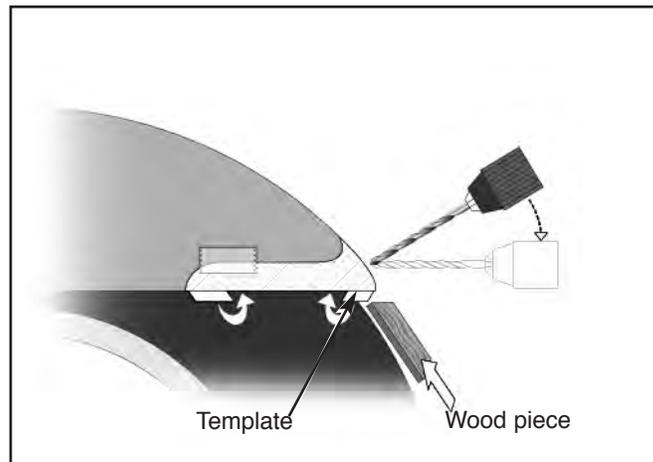


Figure 5

Install Fender Tip

3. Remove liner from tape. Carefully slide tip on fender inserting mounting stud through drill hole. **Figure 6**

4. Squeeze sides of tip against fender. **Figure 7**

5. Place a Washer onto the stud and secure with Hex Nut. **Figure 8**

6. Carefully tighten Nut with wrench. The nut should be tight enough to avoid rattles. **(9mm Open End Wrench) Figure 8**

7. Check the tightness of the nuts regularly.

Note: Stock photos used in illustrating this installation.

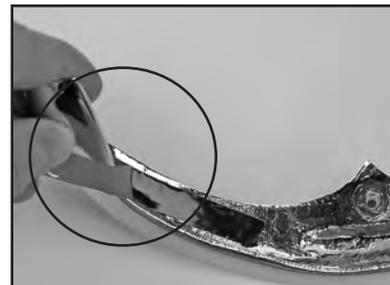


Figure 6



Figure 7



Figure 8

PARTS LIST FOR N7048 REAR OF FRONT FENDER

<u>Part</u>	<u>Description</u>	<u>Qty.</u>
70-710099R-000	Rear of Front Fender	1

Parts from Bag #500 used in Rear of Front installation

49-490531-000	Washer	2
42-423050-000	Nut, Nylok	2
55-568216-000	Screw, M5	2



Note: Stock photos used in illustrating this installation.

INSTALLATION INSTRUCTION

Part No. N7048 For Indian® Scout
Rear of Front Fender Tip

Page 3



Figure 9

PREPARATION

1. Position motorcycle securely on its center stand or a work stand.

Clean the Front Fender

2. Thoroughly clean fender where Fender Tip will be installed. **Figure 9**

INSTALLATION

1. Carefully, position the Rear of Front Fender Tip on the fender, make sure the Tip is centered on the fender.

Figure 10



Figure 10

2. Mark the hole locations with the marking pen. **Figure 10**

3. Remove the Fender Tip.

4. To avoid the drill slipping on the fender, use a Center Punch to make an impression at the center of your mark.

(Center Punch) Figure 11



Due to close clearances between front fender and tire, place block of wood between the fender and the tire to avoid tire damage.

5. Drill holes through the fender at the marks. Drill hole normal to surface. **(Power Drill with 3/16" Drill Bit.)**

6. Position the Fender Tip, and squeeze fender toward tip. Insert the Screws from the outside. Install the Washers and Nuts to the inside. Tighten securely. **(Phillips Screw Driver and 5/16" Open End Wrench) Figure 12**



Figure 11


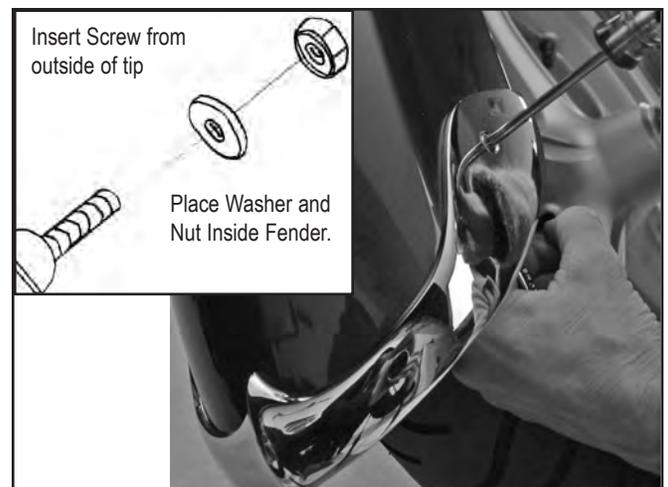


Figure 12

MAINTENANCE

Clean and polish with a chrome cleaner/polish. Check tightness of the nuts regularly.

N7048 INDIAN SCOUT FRONT FENDER TIP TEMPLATE

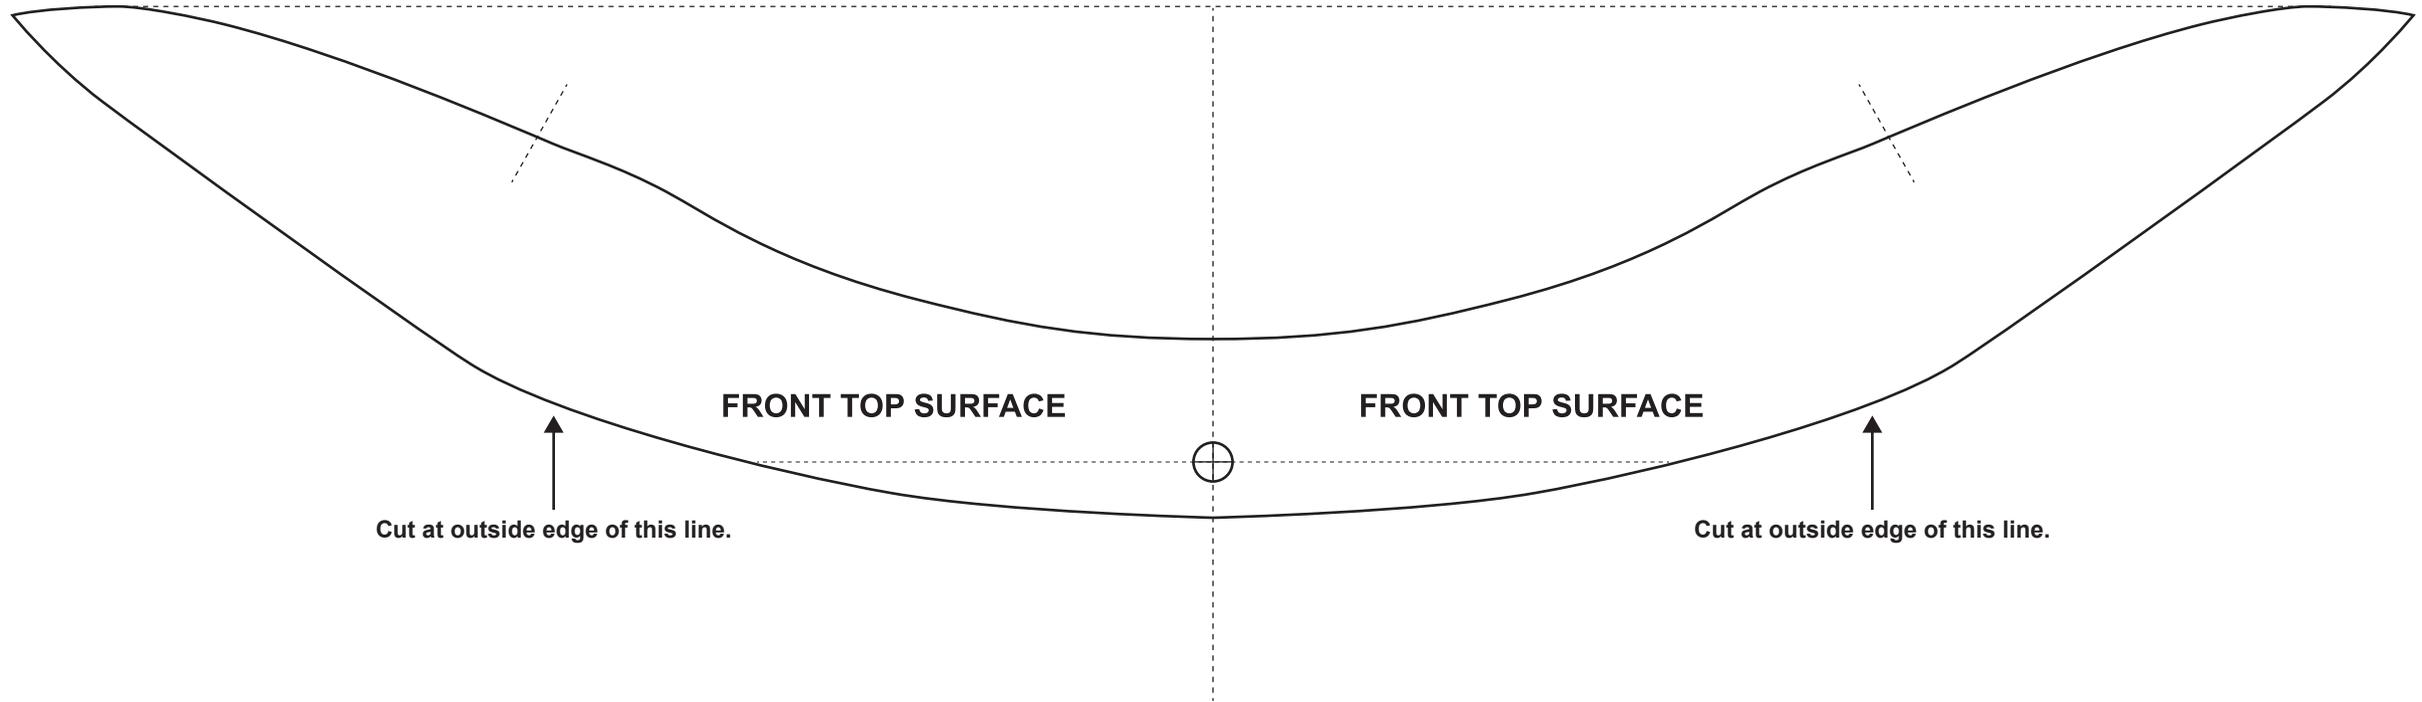

FRONT TOP SURFACE

Cut at outside edge of this line.

FRONT TOP SURFACE

Cut at outside edge of this line.



SIX-INCH VERIFICATION SCALE