

Thank you for purchasing a National Cycle product. Read these instructions carefully and thoroughly before beginning work. Dealers, if installing this windshield for a customer, please give them this manual upon completion. It contains information needed to properly maintain and use this product.

PACKAGE CONTENTS

ITEM	PART NO.	DESCRIPTION	QUANTITY
A		VStream; Polycarbonate	1
B	44-447300-000	Grommets; Rubber; Black	4

TOOLS REQUIRED
5mm Allen Wrench

**ALL OEM FASTENERS
WILL BE REUSED.**

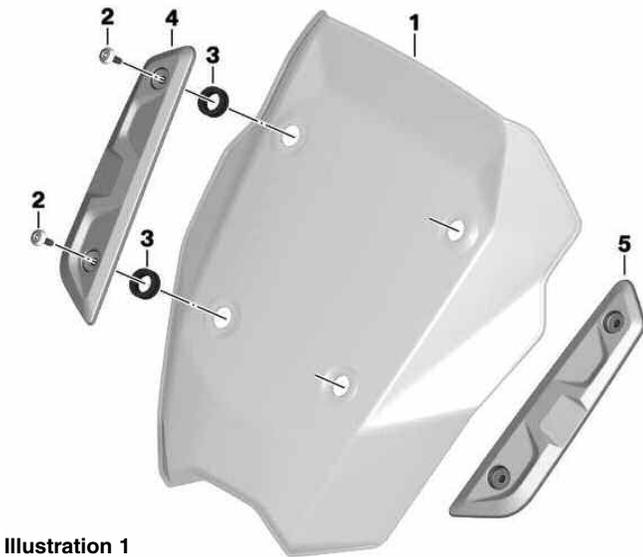


Illustration 1

PREPARATION

Position the vehicle securely on its centerstand. Cover the fairing and front fender while you work to avoid scratches.

Illustration 1

With a 5mm Allen Wrench, remove the four M5x20 Body Screws (2) and the Left Windscreen Cover (4) and Right Windscreen Cover (5) from the OEM Windscreen (1).

Remove the OEM Windscreen. The OEM Grommets (3) can be left in place. They will not be reused.

Illustration 2

Insert the Rubber Grommets (B) into the Windscreen (A).

Press the Left/Right Windscreen Covers (4/5) onto the assembled VStream Windscreen/Grommets (A/B).

Align the Windscreen/Grommet/Cover assembly to the windscreen mount holes of the vehicle. Insert each of the four OEM M5x20 Body Screws (2) and tighten securely.

Now you're finished. Enjoy the ride!

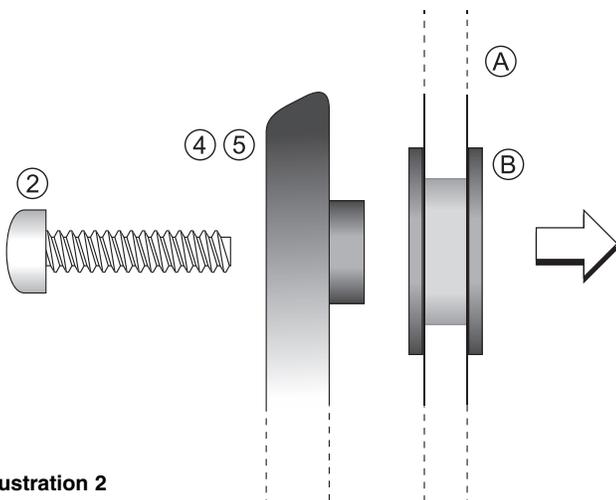


Illustration 2



CLEANING AND MAINTENANCE

To clean your windshield, wash with a clean soft cloth and plenty of warm water and, if necessary, a non-abrasive soap such as dishwashing liquid. Flannel or soft chamois make good cleaning cloths. Paint, glue residue or grease removal: Moisten cotton wad with naphtha or turpentine followed by a wash as above.

National Cycle **Shield Wash™** (N1401-01) makes a good daily cleaner and comes with a handy travel-size bottle. Shield Wash is safe for all windshields and helmet visors

Do not clean polycarbonate in hot sun or high temperatures. Do not clean the screen with household glass cleaners. Do not allow brake fluid, alcohol, or strong solvents to contact the screen.

RAIN REPELLENT

Do not use rain protective products made for glass. We recommend National Cycle's **RainZip®** (N1410-01) to keep your windshield clear in rainy weather.



Register Your Windshield Online at www.nationalcycle.com

National Cycle/ZTechnik 3-Year Limited Warranty

National Cycle hereby warrants to the original registered owner of a National Cycle polycarbonate windshield for a period of three years from the date of purchase against breakage. This limited warranty is expressly limited to the replacement of the polycarbonate windshield. This limited warranty does not include scratches, coating failure, cosmetic wear and tear, replacement of hardware, or any consequential damages or expenses including labor cost of installation, removal and/or replacement, inconvenience, inbound freight expenses or damage to any other component of the motorcycle or any other accessories. Certain chemicals, generally known as acidic hydrocarbons, are known to cause polycarbonate damage and will not be covered under this limited warranty. Please refer to the cleaning instructions supplied with all National Cycle windshields.

Visit www.nationalcycle.com for further details, or call or write National Cycle

WARNING

Never ride your motorcycle with loose accessory mounting hardware. Check the hardware for tightness regularly.

Today's motorcycles are built with enough frame rigidity to withstand the moderate loads imposed on them by the foreseeable addition of an accessory(ies). If an accessory(ies) adversely affects your motorcycle's stability, immediately remove the accessory(ies). Do not ride a motorcycle that exhibits unsafe handling traits.

Have experienced service personnel correct any problem before riding with the accessory(ies) installed. For further questions concerning handling problems associated with an accessory(ies), contact your dealer, motorcycle manufacturer, or accessory manufacturer.

Sunlight reflected off the inside curvature of the windshield can, at certain times of day, cause extreme heat buildup on the motorcycles instruments and possibly even melt them. Exercise care in parking to avoid this. Park your motorcycle facing the sun or place an opaque object over this area.